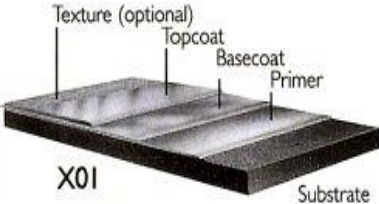
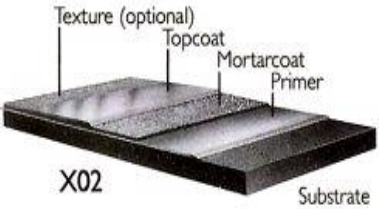
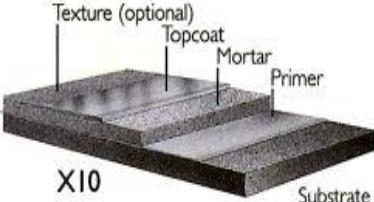
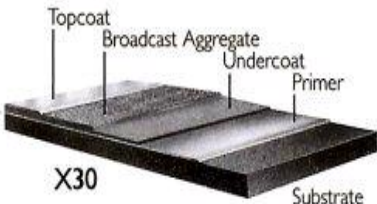
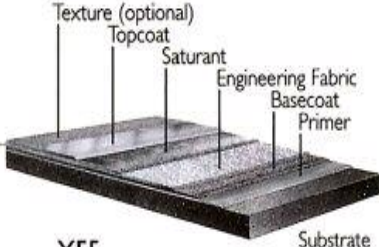
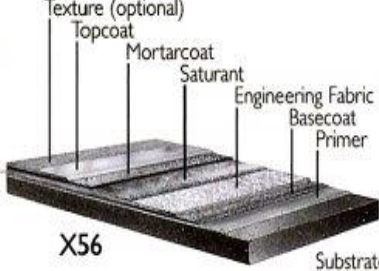

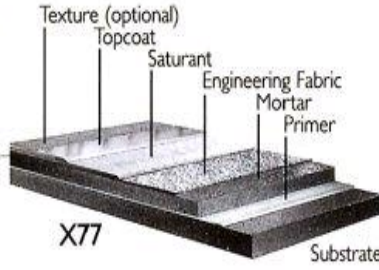
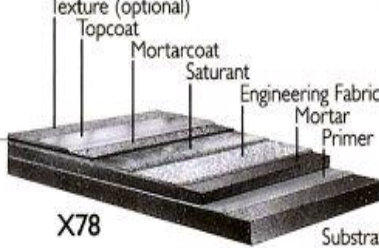
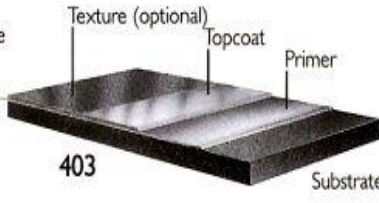
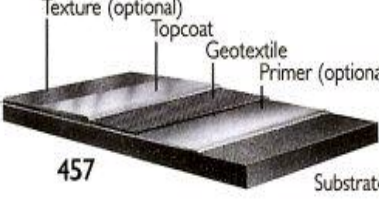


	Applications/Performance Characteristics										Optional Properties		Configurations	
	Over Cracks	Foot Traffic	Rubber Wheel Carts	Steel Wheel Carts	Forklift & Truck	Gouge/Impact	Thermal Shock	Thermal Cycling	Fluorine Service	Non-Sparking	Conductive	Texture		
STONCHEM X01 25 mils	○	●	○	○	○	○	○	○	✓	✓	✓			
STONCHEM X02 40 mils	○	●	○	○	○	○	○	○	✓	✓	✓			
STONCHEM X10 135 mils	○	●	●	●	●	●	○	○	✓	✓	✓			
STONCHEM X30 60-250 mils	○	●	●	○	○	○	○	○			✓			
STONCHEM X55 40 mils	○	●	○	○	○	○	●	●			✓			
STONCHEM X56 60 mils	○	●	●	○	○	○	●	●	✓	✓	✓			
STONCHEM X58 125 mils	○	●	●	●	●	○	○	○			✓			
STONCHEM X77 120 mils	○	●	○	○	○	○	●	●			✓			
STONCHEM X78 140 mils	○	●	●	●	●	●	●	●	✓	✓	✓			
STONCHEM 403 30-120 mils	○	●	●	○	○	○	●	●			✓			
STONCHEM 457 60-120 mils	●	●	●	○	○	○	●	●			✓			

● = Recommended    ○ = Recommended w/Limitations    ○ = Not Recommended